



# R11 - CAN Compact CAN radio receiver

*CAN Output Radio Receiver in a compact, waterproof package.*



Full-color custom labeling and branding available

## FEATURES

### Compliant

- Purpose built for J1939 and NMEA2000 applications

### Compatible

- Works with any 2.4GHz Miratron radio transmitter
- Easy add-on to popular CAN controllers

### Configurable

- Factory programmed for drop-in integration
- Available I/O for E-Stop, sensors, switches, or indicators
- Optional external antenna for extended range


### Simple

- Single connector interface via popular 6-pin DT/AT series
- Low profile screw mount enclosure
- LED's for at-a-gance status and troubleshooting


### Waterproof

- IP67 rated. Ideal for marine and outdoor use

## PINOUT

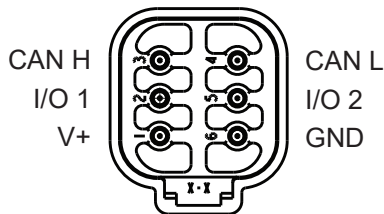

## ORDERING INFORMATION

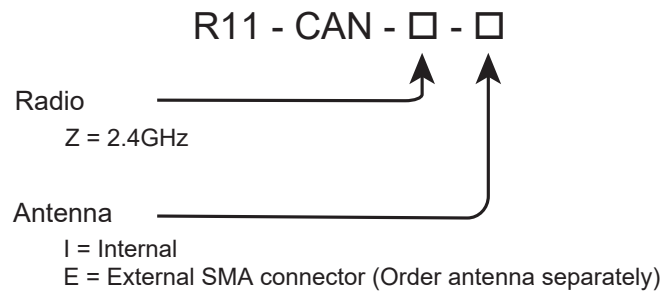

Consult factory for custom antennas and cabling options.

## SPECIFICATIONS

Power	Receiver Supply	12 to 30vdc, 500mA
	Input(s)	12 to 36vdc
	Output(s)	Power supply voltage, 5-Amps max. per channel
Indicators	Status LED's	Status, Radio, CAN, Aux, I/O 1, I/O 2
Connector	6-pin Deutsch/Amphenol	Mates with DT06-6S or AT06-6S plug. Custom cabling available.
Radio	"Z" international version	2.4GHz, Unlicensed ISM band, FHSS
Enclosure	Material	Polycarbonate, IP65/IP66, NEMA 4X
	Dimensions	L 4.53" x W 2.56" x H 1.58"